

EC Series – High Capacity Finned Tube Bundle Shell & Tube Water to Oil Cooling

0124

The EC Series is higher capacity version of the EK series with the same high efficiency finned tube bundle design, handling flows up to 250 GPM. The aluminum finned tube bundle design provides an increased surface area that allows for optimal heat rejection with low water usage. An optional Surge-Cushion® bypass is available for cold start up protection or flow surges. With multiple material options to choose from, this series can be used in a wide variety of applications.

TTP's XSelector® sizing program can help dial in sizing to optimize water usage.



OPTIONS
 Patented built-in Surge-Cushion® bypass
 Type 316 stainless steel or 90/10 copper-nickel components

How to Order

Model Series

EC = NPT Oil connections x NPT Water connections
ECS = SAE O-Ring Oil connections x NPT Water connections
ECM = BSPP Oil connections x BSPP Water connections
ECF = SAE 4 Bolt Flange (Tapped SAE) Oil connections x NPT Water connections
ECFM = SAE 4 Bolt Flange (Tapped Metric) Oil connections; BSPP Water connections

Model Size Selected

1014, 1024, 1036, 1054, 1224, 1236, 1254
1272, 1724, 1736, 1754, 1772, 1784
 (See Performance Curve Charts on pages 2-4 for sizes or XSelector®* sizing program)

Baffle Spacing

4, 6, 7, 9, 12, 14
 (Baffle spacing is dependent on applicable sizes found in sizing charts on pages 2-4 or can be determined by using XSelector®* sizing program)

Tubeside Passes

O - One Pass
T - Two Pass
F - Four Pass

Surge Cushion

Blank - None
R - Surge Cushion

Cooling Tube Material

Blank - Copper
CN - Copper Nickel
SS - 316 Stainless Steel

End Bonnet Material

Blank - Cast Iron
B - Bronze
SB - 316 Stainless Steel

Tubesheet Material

Blank - Steel
W - Copper Nickel
S - 316 Stainless Steel

Zinc Anodes

Blank - None
Z - Zinc Anodes

Optional Surge-Cushion®

The **Surge-Cushion®** is a patented protective device designed to internally bypass a portion of the oil flow during cold start conditions, or when sudden flow surges temporarily exceed the maximum flow allowed for a given cooler. This device may replace an external bypass, but it is not intended to bypass the total oil flow.

Features

High Flow Capacity & Performance

3/8" Tube Size

High Efficiency Finned Bundle Design

End Bonnets Removable For Easy Tube Cleaning

Mounting Brackets May Be Rotated For Simple Installation

Cooling Tube Side Material Options

- Steel
- Stainless Steel
- Copper Nickel
- Bronze

Multiple Connection Options

- NPT x NPT
- SAE x NPT
- BSPP x BSPP
- SAE Code 61 x NPT
- SAE Code 61 x BSPP

End Bonnets Removable For Servicing

Mounting Feet Included (May be rotated in 90° increments)

Materials

Tubes Copper/Copper Nickel/Stainless Steel

Shell Steel

Baffles Steel

End Bonnets Cast Iron/Bronze/Stainless Steel

Fins Aluminum

Tubesheet Steel/Copper Nickel/Stainless Steel

Mounting Brackets Carbon Steel

Gaskets Nitrile Rubber/Cellulose Fiber

Nameplate Aluminum Foil

Ratings

Maximum Operating Pressure - Shell Side 300 PSI

Maximum Operating Pressure - Tube Side 150 PSI

Maximum Operating Temperature 300°F

* To register for XSelector® please go to www.thermaltransfer.com/get-in-touch/ and complete the XSelector® Inquiry form and submit. Download the XSelector® for both Apple and Android formats by searching for XSelector® in their App Stores. You must first register for XSelector® before using it on mobile devices.

Selection Procedure

Performance Curves are based on 100SSU oil leaving the cooler 40°F higher than the incoming water temperature (40°F approach temperature).

STEP 1 Determine the Heat Load. This will vary with different systems, but typically coolers are sized to remove 25 to 50% of the input nameplate horsepower.
(Example: 100 HP Power Unit x .33 = 33 HP Heat load.)

$$\text{If BTU/HR is known: HP} = \frac{\text{BTU/HR}}{2545}$$

STEP 2 Determine Approach Temperature.

$$\text{Desired oil leaving cooler } ^\circ\text{F} - \text{Water Inlet temp. } ^\circ\text{F} = \frac{\text{Actual}}{\text{Approach}}$$

STEP 3 Determine Curve Horsepower Heat Load. Enter the information from above:

$$\text{HP heat load} \times \frac{40}{\text{Actual Approach}} \times \frac{\text{Viscosity}}{\text{Correction A}} = \text{Curve Horsepower}$$

STEP 4 Enter curves at oil flow through cooler and curve horsepower. Any curve above the intersecting point will work.

STEP 5 Determine Oil Pressure Drop from Curves. Multiply pressure drop from curve by correction factor B found on oil viscosity correction curve.

$$I = 5 \text{ PSI} \quad n = 10 \text{ PSI} \quad s = 20 \text{ PSI}$$

Oil Temperature

Oil coolers can be selected by using entering or leaving oil temperatures.

Typical operating temperature ranges are:

Hydraulic Motor Oil	110°F - 130°F
Hydrostatic Drive Oil	130°F - 180°F
Lube Oil Circuits	110°F - 130°F
Automatic Transmission Fluid	200°F - 300°F

Desired Reservoir Temperature

Return Line Cooling: Desired temperature is the oil temperature leaving the cooler. This will be the same temperature that will be found in the reservoir.

Off-Line Recirculation Cooling Loop: Desired temperature is the temperature entering the cooler. In this case, the oil temperature change must be determined so that the actual oil leaving temperature can be found. Calculate the oil temperature change (Oil #T) with this formula:

$$\text{Oil } \#T = (\text{BTUs/HR}) / (\text{GPM Oil Flow} \times 210)$$

To calculate the oil leaving temperature from the cooler, use this formula:

$$\text{Oil Leaving Temperature} = \text{Oil Entering Temperature} - \text{Oil } \#T$$


This formula may also be used in any application where the only temperature available is the entering oil temperature.

Oil Pressure Drop: Most systems can tolerate a pressure drop through the heat exchanger of 20 to 30 PSI. Excessive pressure drop should be avoided. Care should be taken to limit pressure drop to 5 PSI or less for case drain applications where high back pressure may damage the pump shaft seals.

Performance Curves

For additional sizing information consider using TTP's **XSelector®** online sizing Program.*

1:1 Oil to Water Ratio – High Water Usage

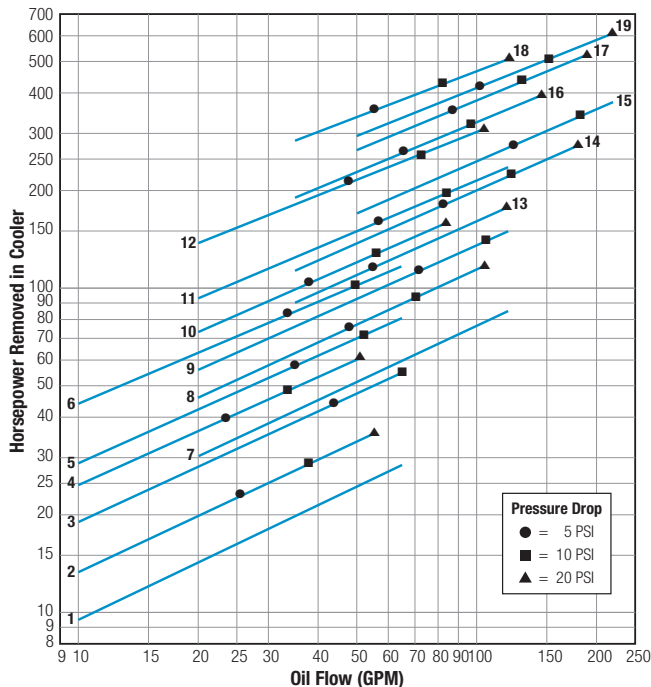


Curve Number	Model	Approximate Weight (LBS)	
		Net	Shipping
1	EC-1014-7-0	28	28
2	EC-1014-4-0	28	28
3	EC-1024-6-0	45	45
4	EC-1024-4-0	45	45
5	EC-1036-6-0	66	66
6	EC-1054-7-0	105	105
7	EC-1224-12-0	98	98
8	EC-1224-6-0	98	98
9	EC-1236-9-0	125	125
10	EC-1236-6-0	125	125
11	EC-1254-9-0	155	155
12	EC-1272-9-0	210	210
13	EC-1724-6-0	145	145
14	EC-1736-9-0	201	201
15	EC-1754-14-0	275	275
16	EC-1754-9-0	275	275
17	EC-1772-12-0	330	330
18	EC-1772-9-0	330	330
19	EC-1784-14-0	390	390

* To register for XSelector® please go to www.thermaltransfer.com/get-in-touch/ and complete the XSelector® Inquiry form and submit. Download the XSelector® for both Apple and Android formats by searching for XSelector® in their App Stores. You must first register for XSelector® before using it on mobile devices.

Performance Curves


For additional sizing information consider using TTP's **XSelector®** online sizing Program.*

2:1 Oil to Water Ratio – Lower Water Usage

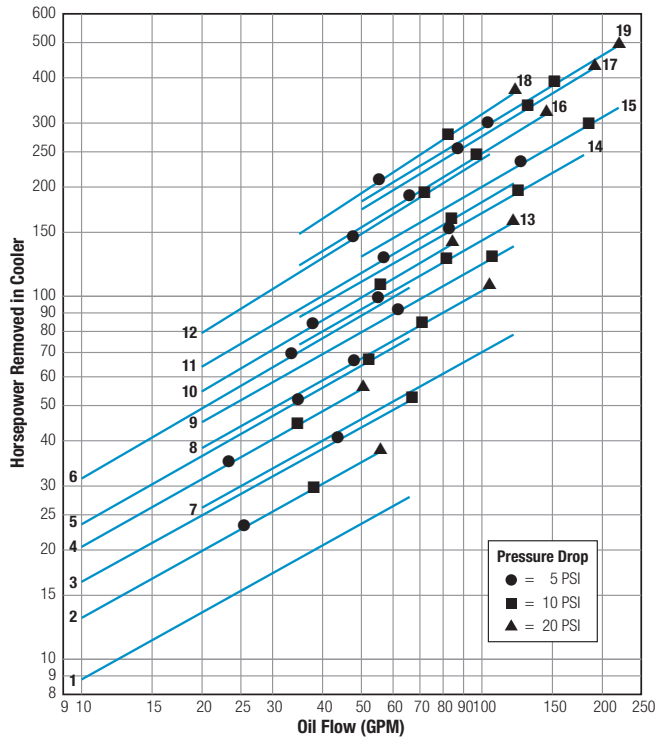

Curve Number	Model	Approximate Weight (LBS)	
		Net	Shipping
1	EC-1014-7-T	28	32
2	EC-1014-4-T	28	32
3	EC-1024-6-T	45	50
4	EC-1024-4-T	45	50
5	EC-1036-6-T	66	70
6	EC-1054-7-T	105	140
7	EC-1224-12-T	98	105
8	EC-1224-6-T	98	105
9	EC-1236-9-T	125	145
10	EC-1236-6-T	125	145
11	EC-1254-9-T	155	185
12	EC-1272-9-T	210	250
13	EC-1724-6-T	145	175
14	EC-1736-9-T	201	235
15	EC-1754-14-T	275	305
16	EC-1754-9-T	275	305
17	EC-1772-12-T	330	380
18	EC-1772-9-T	330	380
19	EC-1784-14-T	390	450

4:1 Oil to Water Ratio – Low Water Usage

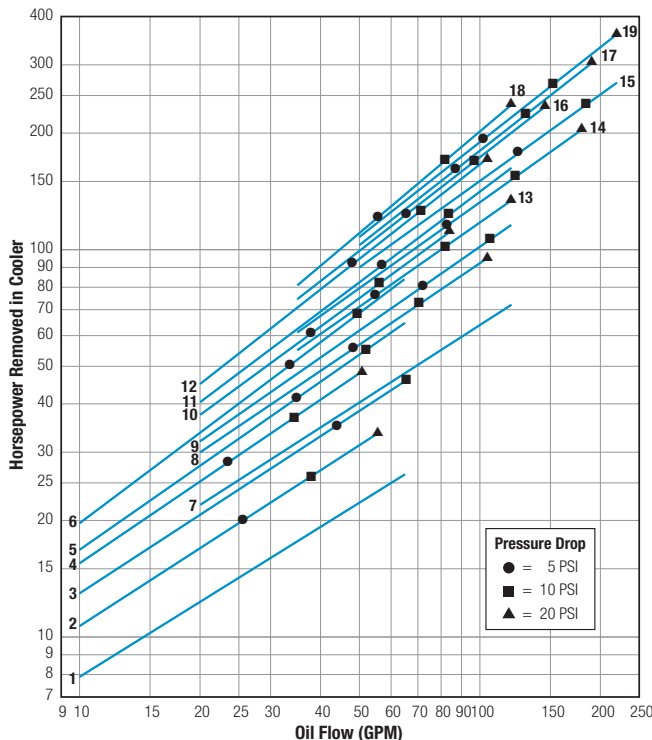


Curve Number	Model	Approximate Weight (LBS)	
		Net	Shipping
1	EC-1014-7-F	28	32
2	EC-1014-4-F	28	32
3	EC-1024-6-F	45	50
4	EC-1024-4-F	45	50
5	EC-1036-6-F	66	70
6	EC-1054-7-F	105	140
7	EC-1224-12-F	98	105
8	EC-1224-6-F	98	105
9	EC-1236-9-F	125	145
10	EC-1236-6-F	125	145
11	EC-1254-9-F	155	180
12	EC-1272-9-F	210	250
13	EC-1724-6-F	145	175
14	EC-1736-9-F	201	235
15	EC-1754-14-F	275	305
16	EC-1754-9-F	275	305
17	EC-1772-12-F	330	380
18	EC-1772-9-F	330	380
19	EC-1784-14-F	390	450

* To register for **XSelector®** please go to www.thermaltransfer.com/get-in-touch/ and complete the **XSelector®** Inquiry form and submit. Download the **XSelector®** for both Apple and Android formats by searching for **XSelector®** in their App Stores. You must first register for **XSelector®** before using it on mobile devices.

Performance Curves


For additional sizing information consider using TTP's **XSelector®** online sizing Program.*

7:1 Oil to Water Ratio – Lower Water Usage

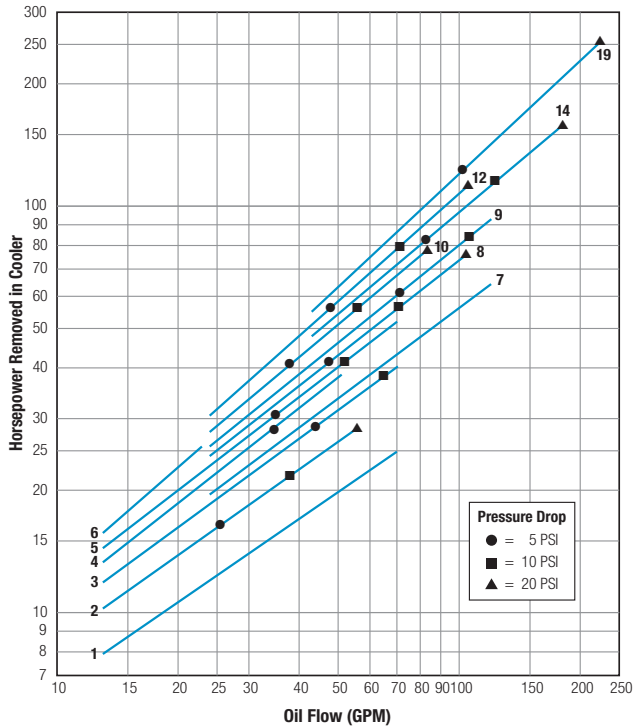

Curve Number	Model	Approximate Weight (LBS)	
		Net	Shipping
1	EC-1014-7-F	28	32
2	EC-1014-4-F	28	32
3	EC-1024-6-F	45	50
4	EC-1024-4-F	45	50
5	EC-1036-6-F	66	70
6	EC-1054-7-F	105	140
7	EC-1224-12-F	98	105
8	EC-1224-6-F	98	105
9	EC-1236-9-F	125	145
10	EC-1236-6-F	125	145
12	EC-1254-9-F	210	250
14	EC-1736-9-F	201	235
19	EC-1784-14-F	390	450


10:1 Oil to Water Ratio – Low Water Usage

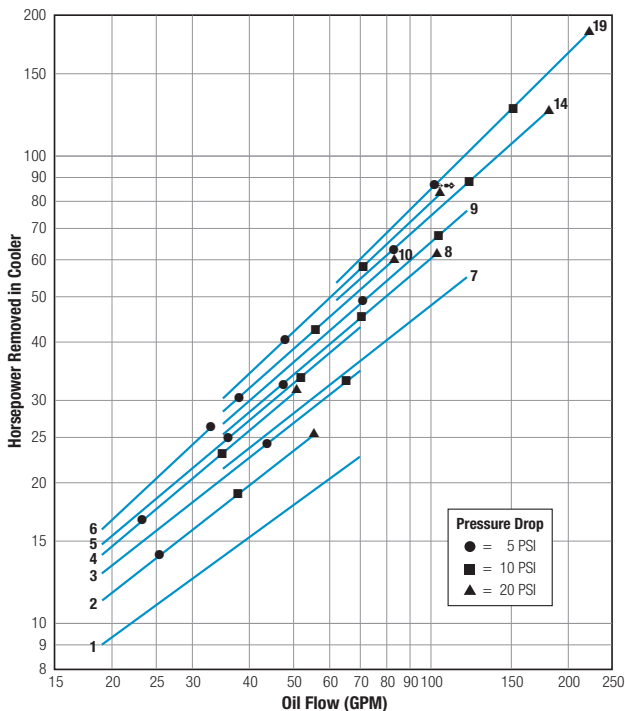

Curve Number	Model	Approximate Weight (LBS)	
		Net	Shipping
1	EC-1014-7-F	28	32
2	EC-1014-4-F	28	32
3	EC-1024-6-F	45	50
4	EC-1024-4-F	45	50
5	EC-1036-6-F	66	70
6	EC-1054-7-F	105	140
7	EC-1224-12-F	98	105
8	EC-1224-6-F	98	105
9	EC-1236-9-F	125	145
10	EC-1236-6-F	125	145
12	EC-1254-9-F	210	250
14	EC-1736-9-F	201	235
19	EC-1784-14-F	390	450

* To register for **XSelector®** please go to www.thermaltransfer.com/get-in-touch/ and complete the **XSelector®** Inquiry form and submit. Download the **XSelector®** for both Apple and Android formats by searching for **XSelector®** in their App Stores. You must first register for **XSelector®** before using it on mobile devices.

Oil Viscosity Correction Multipliers

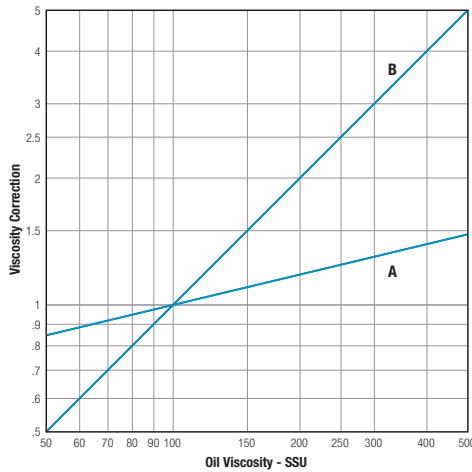

Maximum Flow Rates


Unit Size	Shell Side GPM	Tube Side GPM		
		One Pass	Two Pass	Four Pass
1000	70	65	32	16
1200	120	120	60	30
1700	250	220	110	65

Incorrect installation can cause premature failure.

Dimensions

One Pass

For 3D models and spec sheets visit the EC product page on our website.
<https://www.thermaltransfer.com/product/ec-series>

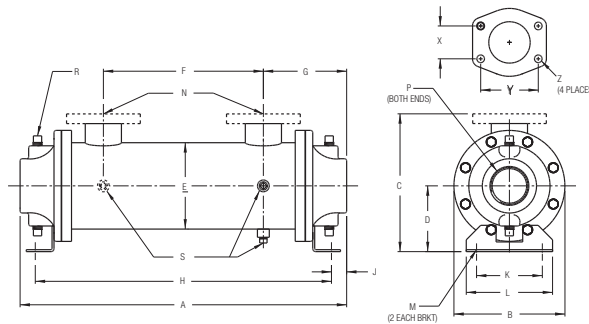


SAE Flange Size	X	Y	Z
1½	1.41	2.75	1/2 - 13 UNC-2B
2	1.69	3.06	1/2 - 13 UNC-2B
3	2.44	4.19	5/8 - 11 UNC 2B

Model	A	B Diameter	C		D	E Diameter	F	G	H	J	K	L	M	N		P NPT BSPP	R NPT BSPP	S NPT BSPP
			NPT/BSPP SAE O-Ring	SAE Flange										NPT/BSPP Flange	SAE O-Ring			
EC-1014	20.38	6.75	7.75	8.00	4.00	5.25	10.12	5.12	18.54	.92	4.00	5.25	.50 x .75 Slot	1½	-24 1½ - 12	2	(4) 3/8	(3) 3/8
EC-1024	30.38	6.75	7.75	8.00	4.00	5.25	20.12	5.12	28.54	.92	4.00	5.25		1½	-24 1½ - 12	2	(4) 3/8	(3) 3/8
EC-1036	42.38	6.75	7.75	8.00	4.00	5.25	32.12	5.12	40.54	.92	4.00	5.25		1½	-24 1½ - 12	2	(4) 3/8	(3) 3/8
EC-1054	60.38	6.75	7.75	8.00	4.00	5.25	50.12	5.12	58.54	.92	4.00	5.25		1½	-24 1½ - 12	2	(4) 3/8	(3) 3/8
EC-1224	30.88	7.75	8.75	9.38	4.50	6.25	18.97	5.95	28.25	1.31	5.00	6.25		2	-32 2½ - 12	3	(4) 1/2	(3) 3/8
EC-1236	42.88	7.75	8.75	9.38	4.50	6.25	30.97	5.95	40.25	1.31	5.00	6.25		2	-32 2½ - 12	3	(4) 1/2	(3) 3/8
EC-1254	60.88	7.75	8.75	9.38	4.50	6.25	48.97	5.95	58.25	1.31	5.00	6.25		2	-32 2½ - 12	3	(4) 1/2	(3) 3/8
EC-1272	78.88	7.75	8.75	9.38	4.50	6.25	66.97	5.95	76.25	1.31	5.00	6.25		2	-32 2½ - 12	3	(4) 1/2	(3) 3/8
EC-1724	33.38	10.50	11.50	12.50	5.75	8.50	18.75	7.31	28.88	2.25	7.00	8.25	.62 x .88 Slot	3	N/A	4	(4) 1/2	(3) 3/8
EC-1736	45.38	10.50	11.50	12.50	5.75	8.50	30.75	7.31	40.88	2.25	7.00	8.25		3	N/A	4	(4) 1/2	(3) 3/8
EC-1754	63.38	10.50	11.50	12.50	5.75	8.50	48.75	7.31	58.88	2.25	7.00	8.25		3	N/A	4	(4) 1/2	(3) 3/8
EC-1772	81.38	10.50	11.50	12.50	5.75	8.50	66.75	7.31	76.88	2.25	7.00	8.25		3	N/A	4	(4) 1/2	(3) 3/8
EC-1784	93.38	10.50	11.50	12.50	5.75	8.50	78.75	7.31	88.88	2.25	7.00	8.25		3	N/A	4	(4) 1/2	(3) 3/8

NOTE: All dimensions in inches. We reserve the right to make reasonable design changes without notice.

For 3D models and spec sheets visit the EC product page on our website.
<https://www.thermaltransfer.com/product/ec-series>

Two Pass

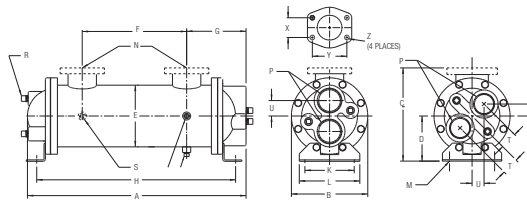


EC-1200 EC-1000 & 1700

SAE Flange Size	X	Y	Z
1½	1.41	2.75	1/2 - 13 UNC-2B
2	1.69	3.06	1/2 - 13 UNC-2B
3	2.44	4.19	5/8 - 11 UNC 2B

Model	A	B Diameter	C		D	E Diameter	F	G	H	J	K	L	M	N		P NPT BSPP	R NPT BSPP	S NPT BSPP	T	U
			NPT/BSPP SAE O-Ring	SAE Flange										NPT/BSPP Flange	SAE O-Ring					
EC-1014	20.27	6.75	7.75	8.00	4.00	5.25	10.12	5.08	18.54	.87	4.00	5.25	.50 x .75 Slot	1½	-24 1½ - 12	1½	(4) 3/8	3/8	1.50	1.06
EC-1024	30.27	6.75	7.75	8.00	4.00	5.25	20.12	5.08	28.54	.87	4.00	5.25		1½	-24 1½ - 12	1½	(4) 3/8	3/8	1.50	1.06
EC-1036	42.27	6.75	7.75	8.00	4.00	5.25	32.12	5.08	40.54	.87	4.00	5.25		1½	-24 1½ - 12	1½	(4) 3/8	3/8	1.50	1.06
EC-1054	60.27	6.75	7.75	8.00	4.00	5.25	50.12	5.08	58.54	.87	4.00	5.25		1½	-24 1½ - 12	1½	(4) 3/8	3/8	1.50	1.06
EC-1224	30.19	7.75	8.75	9.38	4.50	6.25	18.97	5.52	28.31	.88	5.00	6.25		2	-32 2½ - 12	2	(4) 1/2	(3) 3/8	—	1.56
EC-1236	42.19	7.75	8.75	9.38	4.50	6.25	30.97	5.52	40.31	.88	5.00	6.25		2	-32 2½ - 12	2	(4) 1/2	(3) 3/8	—	1.56
EC-1254	60.19	7.75	8.75	9.38	4.50	6.25	48.97	5.52	58.31	.88	5.00	6.25		2	-32 2½ - 12	2	(4) 1/2	(3) 3/8	—	1.56
EC-1272	78.19	7.75	8.75	9.38	4.50	6.25	66.97	5.52	76.31	.88	5.00	6.25	2	-32 2½ - 12	2	(4) 1/2	(3) 3/8	—	1.56	
EC-1724	32.33	10.50	11.50	12.50	5.75	8.50	18.75	7.14	28.94	2.08	7.00	8.25	.63 x .88 Slot	3	N/A	2	(4) 1/2	(3) 3/8	2.25	1.59
EC-1736	44.33	10.50	11.50	12.50	5.75	8.50	30.75	7.14	40.94	2.08	7.00	8.25		3	N/A	2	(4) 1/2	(3) 3/8	2.25	1.59
EC-1754	62.33	10.50	11.50	12.50	5.75	8.50	48.75	7.14	58.94	2.08	7.00	8.25		3	N/A	2	(4) 1/2	(3) 3/8	2.25	1.59
EC-1772	80.33	10.50	11.50	12.50	5.75	8.50	66.75	7.14	76.94	2.08	7.00	8.25		3	N/A	2	(4) 1/2	(3) 3/8	2.25	1.59
EC-1784	92.33	10.50	11.50	12.50	5.75	8.50	78.75	7.14	88.94	2.08	7.00	8.25		3	N/A	2	(4) 1/2	(3) 3/8	2.25	1.59

NOTE: All dimensions in inches. We reserve the right to make reasonable design changes without notice.

Four Pass

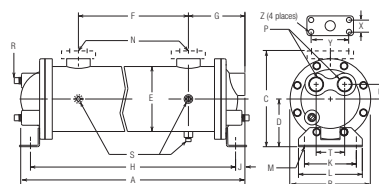

SAE Flange Size	X	Y	Z
1½	1.41	2.75	1/2 - 13 UNC-2B
2	1.69	3.06	1/2 - 13 UNC-2B
3	2.44	4.19	5/8 - 11 UNC 2B

Model	A	B Diameter	C		D	E Diameter	F	G	H	J	K	L	M	N		P NPT BSPP	R NPT BSPP	S NPT BSPP	T	U
			NPT/BSPP SAE O-Ring	SAE Flange										NPT/BSPP Flange	SAE O-Ring					
EC-1014	20.08	6.75	7.75	8.00	4.00	5.25	10.12	4.89	18.60	.69	4.00	5.25	.50 x .75 Slot	1½	-24 1½ - 12	1	(3) 3/8	(3) 3/8	2.39	1.19
EC-1024	30.08	6.75	7.75	8.00	4.00	5.25	20.12	4.89	28.60	.69	4.00	5.25		1½	-24 1½ - 12	1	(3) 3/8	(3) 3/8	2.39	1.19
EC-1036	42.08	6.75	7.75	8.00	4.00	5.25	32.12	4.89	40.60	.69	4.00	5.25		1½	-24 1½ - 12	1	(3) 3/8	(3) 3/8	2.39	1.19
EC-1054	60.08	6.75	7.75	8.00	4.00	5.25	50.12	4.89	58.60	.69	4.00	5.25		1½	-24 1½ - 12	1	(3) 3/8	(3) 3/8	2.39	1.19
EC-1224	30.19	7.75	8.75	9.38	4.50	6.25	18.97	5.51	28.32	.87	5.00	6.25		2	-32 2½ - 12	1½	(1) 3/8 I/O (2) 1/2 return side	(3) 3/8	2.83	1.41
EC-1236	42.19	7.75	8.75	9.38	4.50	6.25	30.97	5.51	40.32	.87	5.00	6.25		2	-32 2½ - 12	1½		(3) 3/8	2.83	1.41
EC-1254	60.19	7.75	8.75	9.38	4.50	6.25	48.97	5.51	58.32	.87	5.00	6.25		2	-32 2½ - 12	1½		(3) 3/8	2.83	1.41
EC-1272	78.19	7.75	8.75	9.38	4.50	6.25	66.97	5.51	76.32	.87	5.00	6.25	2	-32 2½ - 12	1½	(3) 3/8	2.83	1.41		
EC-1724	31.76	10.50	11.50	12.50	5.75	8.50	18.75	7.14	28.88	2.08	7.00	8.25	.62 x .88 Slot	3	N/A	2	(3) 3/8	(3) 3/8	4.25	1.41
EC-1736	43.76	10.50	11.50	12.50	5.75	8.50	30.75	7.14	40.88	2.08	7.00	8.25		3	N/A	2	(3) 3/8	(3) 3/8	4.25	1.41
EC-1754	61.76	10.50	11.50	12.50	5.75	8.50	48.75	7.14	58.88	2.08	7.00	8.25		3	N/A	2	(3) 3/8	(3) 3/8	4.25	1.41
EC-1772	79.76	10.50	11.50	12.50	5.75	8.50	66.75	7.14	76.88	2.08	7.00	8.25		3	N/A	2	(3) 3/8	(3) 3/8	4.25	1.41
EC-1784	91.76	10.50	11.50	12.50	5.75	8.50	78.75	7.14	88.88	2.08	7.00	8.25		3	N/A	2	(3) 3/8	(3) 3/8	4.25	1.41

NOTE: All dimensions in inches. We reserve the right to make reasonable design changes without notice.